AC6932A Datasheet

Zhuhai Jieli Technology Co.,LTD

Version：1.2

Date：2019.12.02

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

AC6932A Features

High performance 32-bit RISC CPU

- DC-160MHz operation
- With 16k read only cache
- 64Vectored interrupts
- 8 Levels interrupt priority
- Coprocessor with mathematic instructions

Flexible I/O

- 7 GPIO pins
- All GPIO pins can be programmable as input or output individually
- All GPIO pins are internal pull-up/pull-down selectable individually
- CMOS/TTL level Schmitt triggered input
- External wake up/interrupt on all GPIOs in all working conditions
- Long press reset on all GPIOs

Peripheral Feature

- One full speed USB 2.0 OTG controller
- Hardware universal algorithm accelerator for FFT and AEC
- Four multi-function 16-bit timers, support capture and PWM mode
- Three 16-bit PWM generator for motor driving with automatic stop protection
- One full-duplex basic UART
- Two full-duplex advanced UART with DMA
- One IIC interface supports host and device mode
- One Quadrate decoder
- One LED light controller
- Watchdog
- One 12/24Mhz Crystal Oscillator
- Hardware Audio algorithm accelerator
- 16-bit Stereo DAC with headphone amplifier, SNR >= 96dB
- 1 channels ADC , SNR >= 90dB
- 1 channel MIC amplifier
- 2 channels analog MUX
- 7 channels 10-bit ADC
- 2 channels 8 levels Low Voltage Detector
- Power-on reset
- Embedded PMU support low power mode
- Integrated Li-ion battery charger,up to supports 200mA fast charging
- Communication with TWS headset charging case

Bluetooth Feature

- CMOS single-chip fully-integrated radio and baseband

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

- Bluetooth V5.1+BR+EDR+BLE specification
- Bluetooth Piconet and Scatternet support
- Meet class2 and class3 transmitting power requirement
- Support 1M GFSK\2M GFSK\S2 CODE\S8 CODE\π/4 DQPSK all paket types
- Provides +4dbm transmitting power
- receiver with -90dBm sensitivity
- Support a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\gatt\rfcomm\sdp\l2cap profile

Power Supply

- VBAT is 2.2V to 4.2V
- VDDIO is 2.2V to 3.6V

Package

- QFN22_3.0x2.5

Temperature

- Operating temperature range: -40℃ to +80℃
- Storage temperature range: -65℃ to +150℃

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1、Pin Definition

1.1 Pin Assignment

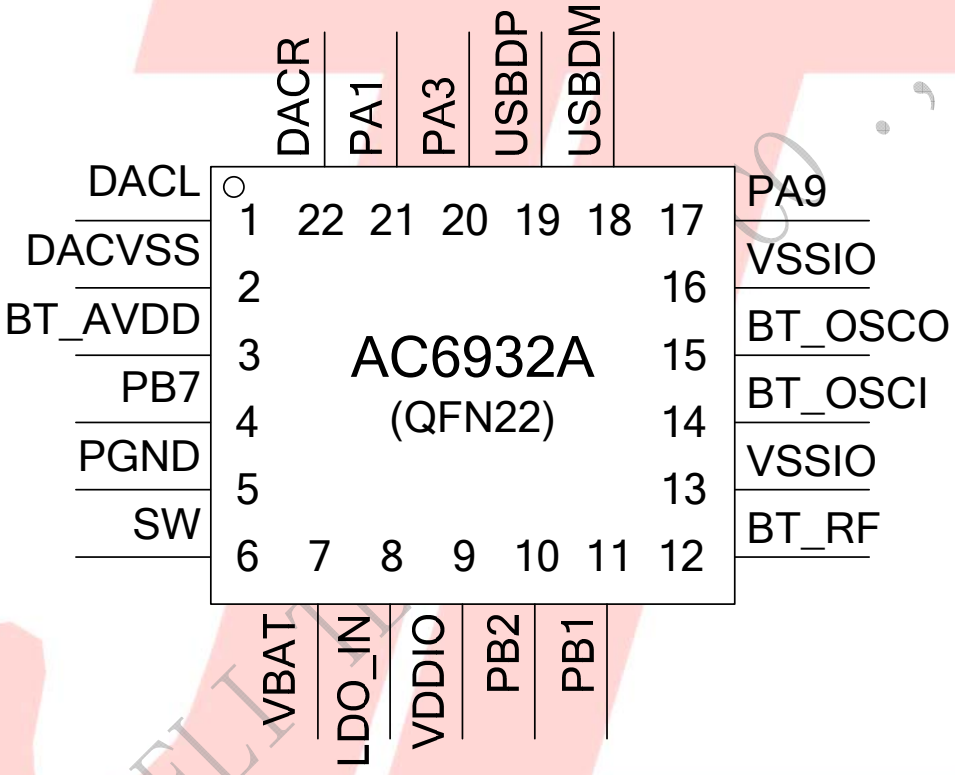


Figure 1-1 AC6932A_QFN22_3.0x2.5 Package Diagram

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1.2 Pin Description

Table 1-1 AC6932A_QFN22_3.0x2.5 Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	DACL	O	/	DAC Left Channel	
2	DACVSS	P	/	Ground	
3	BT_AVDD	P	/	BT Power 1.3v	
4	PB7	I/O	/	GPIO	AMUX0R：Simulator Channel0 Right； ADC9：ADC Input Channel9； UART0TXB：Uart0 Data Output(B)； PWMCH2H：Motor PWM Channel2 (H)
5	PGND	P	/	Ground	
6	SW	P	/	DCDC output	DCDC switch output, connected to inductor
7	VBAT	P	/	LDO Power	
8	LDO_IN	P	/	Charge Power 5v	
9	VDDIO	P	/	IO Power 3.3v	
10	PB2	I/O	/	GPIO	ADC12：ADC Input Channel12； 32K OSC Output;
11	PB1	I/O	/	GPIO (pull up)	Long Press Reset； ADC6：ADC Input Channel6；
12	BT_RF	/	/		
13	VSSIO	P	/	Ground	
14	BT_OSCI	I	/	OSC In	
15	BT_OSCO	O	/	OSC Out	
16	VSSIO	P	/	Ground	
17	PA9	I/O	/	GPIO	ADC4：ADC Input Channel4； UART2TXD：Uart2 Data Output(D)； UART2RXD：Uart2 Data Input(D)； WKUP4：External Edge Wakeup4；
18	USBDM	I/O	/	USB Negative Data	UART1RXD：Uart1 Data In(D)； IIC_SDA_A：IIC SDA(A)； ADC11：ADC Input Channel 11；
19	USBDP	I/O	/	USB Positive Data	UART1TXD：Uart1 Data Out(D)； IIC_SCL_A：IIC SCL(A)； ADC10：ADC Input Channel 10；
20	PA3	I/O	/	GPIO	AMUX1L：Simulator Channel1 Left; ADC1：ADC Input Channel1；

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

					CAP2：Timer2 Capture； UART2TXA：Uart2 Data Output(A)； PWMCH0L：Motor PWM Channel0 (L) WKUP2：External Edge Wakeup2；
21	PA1	I/O	/	GPIO	MIC：MIC Input Channel ; PWM0：Timer0 PWM Output； ADC0：ADC Input Channel0； UART1TXC：Uart1 Data Output(C)； PWMCH0H：Motor PWM Channel0 (H)
22	DACR	O	/	DAC Right Channel	

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2、Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-40	+80	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	-0.3	5.5	V
$V_{3.3IO}$	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V
LDO_IN	Charge Input Voltage	-0.3	5.5	V

2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDOIN	Voltage Input	4.5	5	5.5	V	_
VBAT	Voltage Input	2.2	3.7	5.5	V	
V_{DVDD}	Voltage output	0.9	1.2	1.25	V	VBAT = 4.2V, 30mA loading
V_{VDDIO}	Voltage output	_	3.3	_	V	VBAT = 4.2V, 100mA loading
V_{BT_AVDD}	Voltage output		1.3		V	VBAT=4.2V, 100mA loading
V_{DACVDD}	DAC Voltage	_	3.1	_	V	VBAT = 4.2V, 10mA loading
LDO_IN	Loading current	_	_	150	mA	VBAT = 4.2V

2.3 Battery Charge

Table 2-3

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Charge Input Voltage	4.5	5	5.5	V	_
V_{Charge}	Charge Voltage	4.15	4.2	4.25	V	_
I_{Charge}	Charge Current	20		200	mA	Charge current at fast charge mode
I_{Trikl}	Trickle Charge Current	20	45	70	mA	$V_{BAT} < V_{Trikl}$

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.4 IO Input/Output Electrical Logical Characteristics

Table 2-4

IO input characteristics						
Symbol	**Parameter**	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
V_{IL}	Low-Level Input Voltaget	-0.3	_	0.3* VDDIO	V	VDDIO = 3.3V
V_{IH}	High-Level Input Voltage	0.7* VDDIO	_	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V_{OL}	Low-Level Output Voltaget	_	_	0.33	V	VDDIO = 3.3V
V_{OH}	High-Level Output Voltaget	2.7	_	_	V	VDDIO = 3.3V

2.5 Internal Resistor Characteristics

Table 2-5

<table>
<tr><th>Port</th><th colspan="4">Driving（mA）</th><th>Internal Pull-Up Resistor（kΩ）</th><th>Internal Pull-Down Resistor（kΩ）</th><th>Comment</th></tr>
<tr><td>PA1 PA3 PB1,PB2 PB7</td><td>3</td><td>8</td><td>18</td><td>24</td><td>10</td><td>10</td><td rowspan="3">1、USBDM & USBDP default pull down
2、internal pull-up/pull-down resistance | accuracy ±20%</td></tr>
<tr><td>USBDP</td><td colspan="2" rowspan="2">4</td><td colspan="2" rowspan="2">_</td><td>1.5</td><td>15</td></tr>
<tr><td>USBDM</td><td>180</td><td>15</td></tr>
</table>

2.6 DAC Characteristics

Table 2-6

Parameter	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
Frequency Response	20	_	20K	Hz	1KHz/0dB 10Kohm loading With A-Weighted Filter
THD+N	_	-80	_	dB	
S/N	_	96	_	dB	
Crosstalk	_	-60	_	dB	
Output Swing		0.95		Vrms	
Dynamic Range		94		dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power	11	18	_	mW	32ohm loading

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.7 ADC Characteristics

Table 2-7

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		82		dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
S/N	_	90	_	dB	1KHz/-60dB
THD+N	_	-70	_	dB	10Kohm loading
Crosstalk	_	-80	_	dB	With A-Weighted Filter

2.8 BT Characteristics

2.8.1 Transmitter

Basic Data Rate **Table 2-8-1**

Parameter		Min	Typ	Max	Unit	Test Conditions
RF Transmit Power			4	6	dBm	25℃, Power Supply VBAT=5V 2441MHz
RF Power Control Range			28		dB	
20dB Bandwidth			950		KHz	
Adjacent Channel Transmit Power	+2MHz		-40		dBm	
	-2MHz		-38		dBm	
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

Enhanced Data Rate **Table 2-8-2**

Parameter		Min	Typ	Max	Unit	Test Conditions
Relative Power			-1		dBm	25℃, Power Supply VBAT=5V 2441MHz
π/4 DQPSK Modulation Accuracy	DEVM RMS		5		%	
	DEVM 99%		10		%	
	DEVM Peak		15		%	
Adjacent Channel Transmit Power	+2MHz		-40		dBm	
	-2MHz		-38		dBm	
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.8.2 Receiver

Basic Data Rate **Table 2-8-3**

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25℃, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-10		dB	
Adjacent Channel Interference Rejection	+1MHz		+4		dB	
	-1MHz		+4		dB	
	+2MHz		+34		dB	
	-2MHz		+34		dB	
	+3MHz		+44		dB	
	-3MHz		+25		dB	

Enhanced Data Rate **Table 2-8-4**


Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25℃, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-10		dB	
Adjacent Channel Interference Rejection	+1MHz		+4		dB	
	-1MHz		+4		dB	
	+2MHz		+34		dB	
	-2MHz		+34		dB	
	+3MHz		+44		dB	
	-3MHz		+25		dB	

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3、 Package Information

3.1 QFN22_3.0x2.5

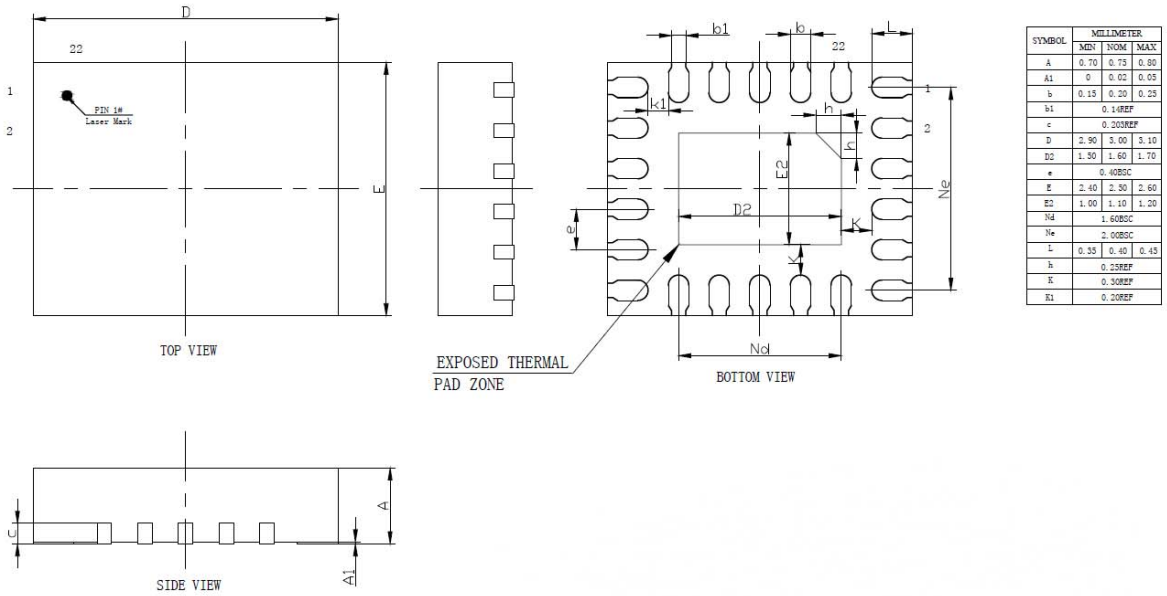

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0	0.02	0.05
b	0.15	0.20	0.25
b1	0.14REF		
c	0.203REF		
D	2.90	3.00	3.10
D2	1.50	1.60	1.70
e	0.40BSC		
E	2.40	2.50	2.60
E2	1.00	1.10	1.20
Nd	1.60BSC		
Ne	2.00BSC		
L	0.35	0.40	0.45
h	0.25REF		
K	0.30REF		
K1	0.20REF		

Figure 3-1 AC6932A_QFN22_3.0x2.5 Package

ZHUHAI JIELI TECH

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

4、Revision History

Date	Revision	Description
2019.05.18	V1.0	Initial Release
2019.08.05	V1.1	Update Bluetooth Version, RF Transmit Power
2019.12.02	V1.2	PIN17 Change DVDD to PA9

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.