AC6953A Datasheet

Zhuhai Jieli Technology Co.,LTD

Version：1.0

Date：2019.11.28

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

AC6953A Features

High performance 32-bit RISC CPU

- RISC 32-bit CPU
- DC-160MHz operation
- Support DSP instructions
- 64Vectored interrupts
- 4 Levels interrupt priority

Flexible I/O

- 8 GPIO pins
- All GPIO pins can be programmable as input or output individually
- All GPIO pins are internal pull-up/pull-down selectable individually
- CMOS/TTL level Schmitt triggered input
- External wake up/interrupt on all GPIOs

Peripheral Feature

- One full speed USB 2.0 OTG controller
- Four multi-function 16-bit timers, support capture and PWM mode
- Three 16-bit PWM generator for motor driving
- One full-duplex basic UART
- Two full-duplex advanced UART
- One IIC interface supports host and device mode
- One Quadrate decoder
- Watchdog
- 1 Crystal Oscillator
- 16-bit Stereo DAC with headphone amplifier, SNR >= 95dB
- 2 channel ADC , SNR >= 90dB
- 1 channel MIC amplifier
- 1 channel Stereo analog MUX
- 5 channels 10-bit ADC
- Power-on reset
- Embedded PMU support low power mode

Bluetooth Feature

- CMOS single-chip fully-integrated radio and baseband
- Compliant with Bluetooth V5.1+BR+EDR+BLE specification
- Bluetooth Piconet and Scatternet support
- Meet class2 and class3 transmitting power requirement
- Support GFSK and π/4 DQPSK all paket types
- Provides +6dbm transmitting power
- receiver with -90dBm sensitivity
- Support a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\gatt\rfcomm\sdp\l2cap profile

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

Power Supply

- VBAT is 2.2V to 5.5V
- VDDIO is 2.2V to 3.6V

Package

- QFN20_3x3

Temperature

- Operating temperature: -20℃ to +70℃
- Storage temperature: -65℃ to +150℃

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1、Pin Definition

1.1 Pin Assignment

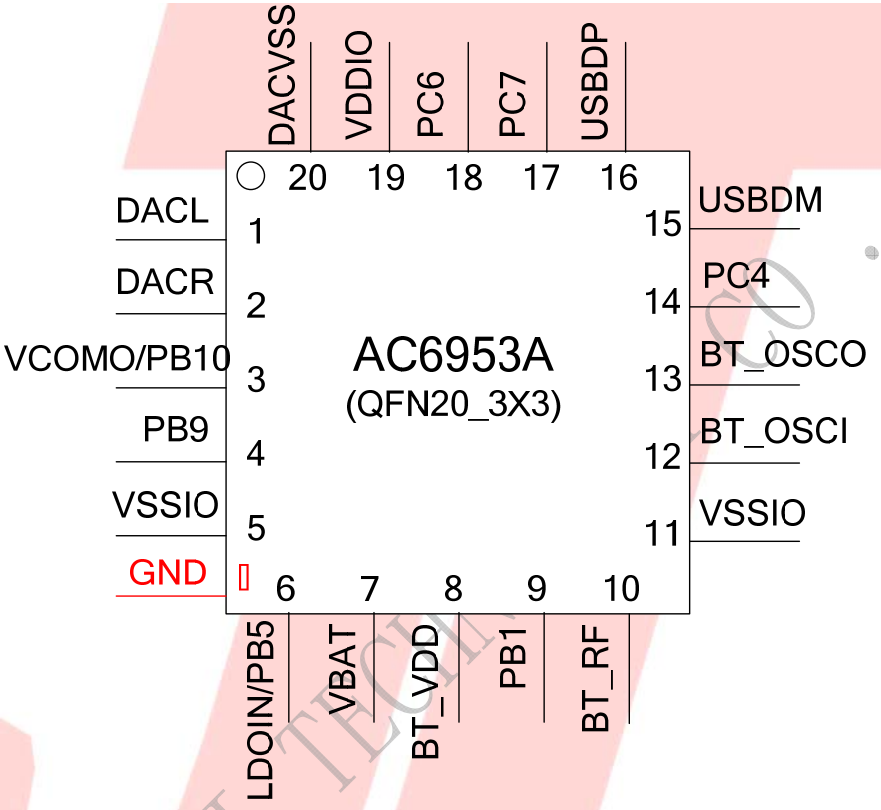


Figure 1-1 AC6953A_QFN20_3x3 Package Diagram

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1.2 Pin Description

Table 1-1 AC6953A_QFN20_3x3 Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	DACL	O	/		DAC Left Channel
2	DACR	O	/		DAC Right Channel
3	VCOMO	/	/		DAC Reference Output
	PB10	I/O	24/8	GPIO	AMUX2R：Analog Channel2 Right; ADC9：ADC Input Channel 9; UART2RXC：Uart2 Data In(C); PWMCH3L：Motor PWM Channel3(L)；
4	PB9	I/O	24/8	GPIO	AMUX2L：Analog Channel2 Left; CAP0：Timer0 Capture; UART2TXC：Uart2 Data Out(C); PWMCH3H：Motor PWM Channel3(H)；
5	VSSIO	P	/	Ground	
6	LDO_IN	P	/	Charge Power 5v	
	PB5	I/O	8	GPIO (High Voltage Resistance)	PWM3：Timer3 PWM Output; CAP1：Timer1 Capture; UART0TXC：Uart0 Data Out(C); UART0RXC：Uart0 Data In(C);
7	VBAT	P	/	LDO Power	
8	BT_AVDD	P	/	BT Power 1.3v	
9	PB1	I/O	24/8	GPIO (pull up)	Long Press Reset； ADC5：ADC Input Channel 5; TMR2：Timer2 Clock Input; UART1RXA：Uart1 Data In(A);
10	BT_RF	/	/		
11	VSSIO	P	/	Ground	
12	BT_OSCI	I	/	OSC In	
13	BT_OSCO	O	/	OSC Out	
14	PC4	I/O	24/8	GPIO	UART2TXD：Uart2 Data Out(D); ADC10：ADC Input Channel 10; PWMCH5H：Motor PWM Channel5(H)；
15	USBDM	I/O	4	USB Negative	UART1RXD：Uart1 Data In(D);

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

				Data (pull down)	IIC_SDA_A：IIC SDA(A);
16	USBDP	I/O	4	USB Positive Data (pull down)	UART1TXD：Uart1 Data Out(D); IIC_SCL_A：IIC SCL(A); ADC12：ADC Input Channel 12;
17	PC7	I/O	/	GPIO	MIC_BIAS：Microphone Bias Output
18	PC6	I/O	24/8	GPIO	MIC：MIC Input Channel; ADC11：ADC Input Channel 11;
19	VDDIO	P	/		IO Power 3.3v
20	DACVSS	P	/		DAC Ground

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2、Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-20	+70	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	2.2	5.5	V
LDO_IN	Charger Voltage	4.5	5.5	V
$V_{3.3IO}$	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V

2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
VBAT	Voltage Input	2.2	3.7	5.5	V	
LDO_IN	Charger Voltage	4.5	5.0	5.5	V	
$V_{3.3}$	Voltage output	_	3.3	_	V	VBAT = 5V, 100mA loading
V_{BT_AVDD}	Voltage output		1.3		V	VBAT=5V, 100mA loading
$I_{L3.3}$	Loading current	_	_	150	mA	VBAT = 5V

2.3 Battery Charge

Table 2-3

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Charge Input Voltage	4.5	5	5.5	V	_
V_{Charge}	Charge Voltage	4.15	4.2	4.25	V	_
I_{Charge}	Charge Current	20		320	mA	Charge current at fast charge mode
I_{Trikl}	Trickle Charge Current	20	45	70	mA	$V_{BAT}<V_{Trikl}$

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.4 IO Input/Output Electrical Logical Characteristics

Table 2-4

IO input characteristics						
Symbol	**Parameter**	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
V_{IL}	Low-Level Input Voltage	-0.3	_	0.3* VDDIO	V	VDDIO = 3.3V
V_{IH}	High-Level Input Voltage	0.7* VDDIO	_	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V_{OL}	Low-Level Output Voltage	_	_	0.33	V	VDDIO = 3.3V
V_{OH}	High-Level Output Voltage	2.7	_	_	V	VDDIO = 3.3V

2.5 Internal Resistor Characteristics

Table 2-5

Port	**General Output**	**High Drive**	**Internal Pull-Up Resistor**	**Internal Pull-Down Resistor**	**Comment**
PB1~PB10 PC4 PC6	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、internal pull-up/pull-down resistance | accuracy ±20%
PC7			10K	10K	
PB5			10K	10K	
USBDP	4mA	_	1.5K	15K	
USBDM	4mA		180K	15K	

2.6 DAC Characteristics

Table 2-6

Parameter	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
Frequency Response	20	_	20K	Hz	1KHz/0dB 10Kohm loading With A-Weighted Filter
THD+N	_	-75	_	dB	
S/N	_	95	_	dB	
Crosstalk	_	-80	_	dB	
Output Swing		1		Vrms	
Dynamic Range		90		dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power	11		_	mW	32ohm loading

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.7 ADC Characteristics

Table 2-7

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		80		dB	1KHz/-60dB
S/N	_	90	91	dB	1KHz/-60dB
THD+N	_	-70	_	dB	
Crosstalk	_	-80	_	dB	

2.8 BT Characteristics

2.8.1 Transmitter

Basic Data Rate **Table 2-8**

Parameter		Min	Typ	Max	Unit	Test Conditions
RF Transmit Power			4	6	dBm	25℃, Power Supply VBAT=5V 2441MHz
RF Power Control Range			20		dB	
20dB Bandwidth			950		KHz	
Adjacent Channel Transmit Power	+2MHz		-40		dBm	
	-2MHz		-38		dBm	
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

Enhanced Data Rate **Table 2-9**

Parameter		Min	Typ	Max	Unit	Test Conditions
Relative Power			-1		dB	25℃, Power Supply VBAT=5V 2441MHz
π/4 DQPSK Modulation Accuracy	DEVM RMS		6		%	
	DEVM 99%		10		%	
	DEVM Peak		15		%	
Adjacent Channel Transmit Power	+2MHz		-40		dBm	
	-2MHz		-38		dBm	
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.8.2 Receiver

Basic Data Rate **Table 2-10**

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25℃, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel Interference Rejection	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

Enhanced Data Rate **Table 2-11**


Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25℃, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel Interference Rejection	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3、 Package Information

3.1 QFN32_4x4

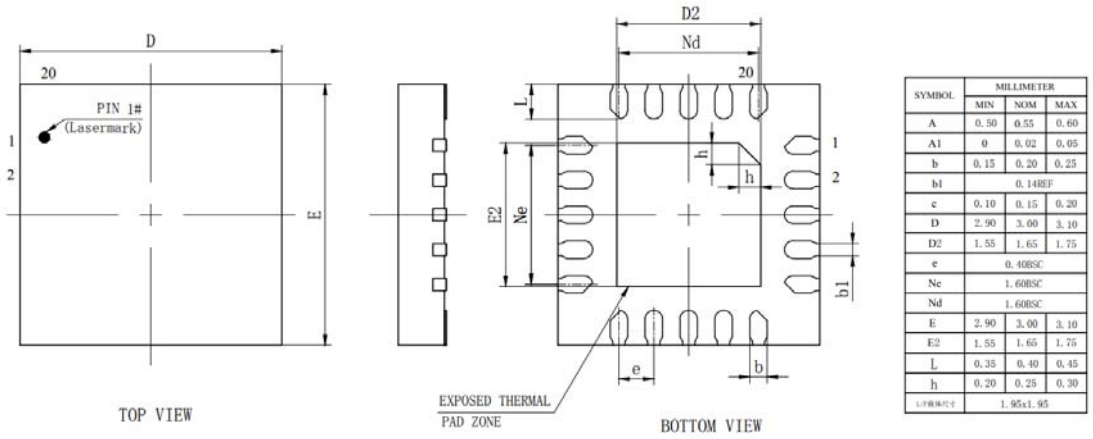

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.50	0.55	0.60
A1	0	0.02	0.05
b	0.15	0.20	0.25
b1		0.14REF	
c	0.10	0.15	0.20
D	2.90	3.00	3.10
D2	1.55	1.65	1.75
e		0.40BSC	
Ne		1.60BSC	
Nd		1.60BSC	
E	2.90	3.00	3.10
E2	1.55	1.65	1.75
L	0.35	0.40	0.45
h	0.20	0.25	0.30
上/下防水尺寸		1.95x1.95	

Figure 3-1 AC6953A_QFN20_3x3 Package

ZHUHAI JIELI TECHNOLOGY

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

4、Revision History

Date	Revision	Description
2019.11.28	V1.0	Initial Release

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.