AC6959G Datasheet

Zhuhai Jieli Technology Co.,LTD

Version：1.0

Date：2019.12.13

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

AC6959G Features

CPU

- 32-bit DSP supports hardware Float Point Unit(FPU)
- Up to 240MHz programmable processor
- 64Vectored interrupts
- 4 Levels interrupt priority

DSP Audio Processing

- SBC, AAC Audio decodes supported for BT audio
- mSBC voice codec supported for BT phone
- Supports MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV, AIF, AIFC audio decoding
- Packet Loss Concealment (PLC) for voice processing
- Acoustic echo cancellation/suppression (AEC,AES)
- Single/Dual MIC Environmental Noise Cancellation (ENC)
- Multi-band DRC limiter
- 10-band EQ configuration for voice Effects

Audio Codec

- Two channels 16-bit DAC, SNR >= 95dB
- Three channels 16-bit ADC , SNR >= 90dB
- Sampling rates of 8KHz/11.025KHz/16KHz/22.05KHz/24KHz/32KHz/44.1KHz/48KHz are supported
- One analog MIC amplifier, build-in MIC bias generator
- Supports cap-less, single-ended, and differential mode at the DAC path
- Supports 16ohm and 32ohm Speaker loading

Bluetooth

- Compliant with Bluetooth V5.1+BR+EDR+BLE specification
- Meet class1 class2 and class3 transmitting power requirement
- Support GFSK and π/4 DQPSK all packet types
- Provides +6dbm transmitting power
- receiver with -90dBm sensitivity
- Fast AGC for enhanced dynamic range
- Supports a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\gatt\rfcomm\sdp\l2cap profile

Peripherals

- One full speed USB 2.0 OTG controller
- Four multi-function 16-bit timers, support capture and PWM mode
- Three 16-bit PWM generator for motor driving
- Three full-duplex basic UART, UART0 and UART1 supports DMA mode
- One hardware IIC interface supports host and device mode
- Built-in Cap Sense Key controller
- 10-bit ADC for analog sampling
- External wake up/interrupt on all GPIOs

PMU

- Low voltage LDO for internal digital and analog circuit supply
- 3uA current consumption in the soft-off mode
- Built-in LDO for the core, I/O, Bluetooth and flash
- VBAT is 2.2V to 5.5V
- VDDIO is 2.2V to 3.6V

Packages

- SOP16

Temperature

- Operating temperature: -20℃ to +70℃
- Storage temperature: -65℃ to +150℃

Applications

- Bluetooth Stereo Earphone

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1、Pin Definition

1.1 Pin Assignment

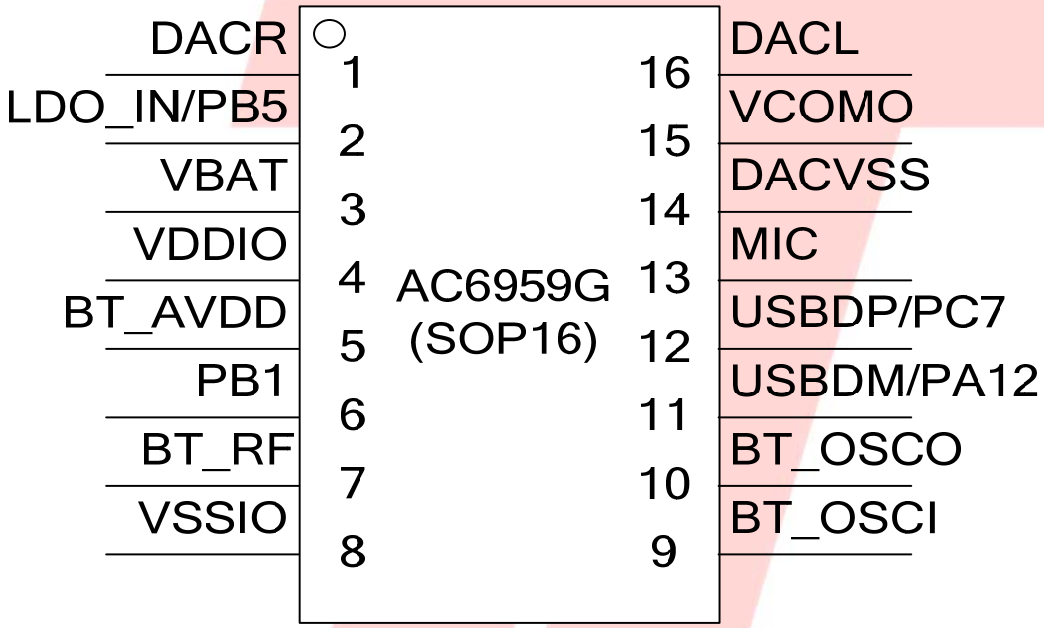


Figure 1-1 AC6959G Package Diagram

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1.2 Pin Description

Table 1-1 AC6959G Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	DACR	O	/		DAC Right Channel
2	LDO_IN	P	/	Charge Power 5v	
	PB5	I/O	8	GPIO (High Voltage Resistance)	PWM3：Timer3 PWM Output; CAP1：Timer1 Capture; UART0TXC：Uart0 Data Out(C); UART0RXC：Uart0 Data In(C);
3	VBAT	P	/	LDO Power	
4	VDDIO	P	/	IO Power 3.3v	
5	BT_AVDD	P	/	BT Power 1.3v	
6	PB1	I/O	24/8	GPIO (pull up)	Long Press Reset； ADC5：ADC Input Channel 5; TMR2：Timer2 Clock Input; UART1RXA：Uart1 Data In(A);
7	BT_RF	P	/		
8	VSSIO	P	/	Ground	
9	BT_OSCI	I	/	OSC In	
10	BT_OSCO	O	/	OSC Out	
11	USBDM	I/O	4	USB Negative Data (pull down)	UART1RXD：Uart1 Data In(D); IIC_SDA_A：IIC SDA(A);
	PA12	I/O	24/8	GPIO	PWM1：Timer1 PWM Output; ADC4：ADC Input Channel 4; UART0RXD：Uart0 Data In(D);
12	USBDP	I/O	4	USB Positive Data (pull down)	UART1TXD：Uart1 Data Out(D); IIC_SCL_A：IIC SCL(A); ADC12：ADC Input Channel 12;
	PC7	I/O	/	GPIO	MIC_BIAS：Microphone Bias Output
13	MIC	I	、		MIC：MIC Input Channel;
14	DACVSS	P	/	Ground	
15	VCOMO	/	/		DAC Reference Output
16	DACL	O	/		DAC Left Channel

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2、Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-20	+70	℃
Tstg	Storage temperature	-65	+150	℃
VBAT	Supply Voltage	2.2	5.5	V
LDO_IN	Charger Voltage	4.5	5.5	V
$V_{3.3IO}$	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V

2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
VBAT	Voltage Input	2.2	3.7	5.5	V	
LDO_IN	Charger Voltage	4.5	5.0	5.5	V	
$V_{3.3}$	Voltage output	_	3.3	_	V	VBAT = 5V, 100mA loading
V_{BT_AVDD}	Voltage output		1.3		V	VBAT=5V, 100mA loading
$I_{L3.3}$	Loading current	_	_	150	mA	VBAT = 5V

2.3 Battery Charge

Table 2-3

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDOIN	Charge Input Voltage	4.5	5	5.5	V	_
V_{Charge}	Charge Voltage	4.15	4.2	4.25	V	_
I_{Charge}	Charge Current	20		320	mA	Charge current at fast charge mode
I_{Trikl}	Trickle Charge Current	20	45	70	mA	V_{BAT} <V_{Trikl}

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.4 IO Input/Output Electrical Logical Characteristics

Table 2-4

IO input characteristics						
Symbol	**Parameter**	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
V_{IL}	Low-Level Input Voltaget	-0.3	_	0.3* VDDIO	V	VDDIO = 3.3V
V_{IH}	High-Level Input Voltage	0.7* VDDIO	_	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V_{OL}	Low-Level Output Voltaget	_	_	0.33	V	VDDIO = 3.3V
V_{OH}	High-Level Output Voltaget	2.7	_	_	V	VDDIO = 3.3V

2.5 Internal Resistor Characteristics

Table 2-5

Port	**General Output**	**High Drive**	**Internal Pull-Up Resistor**	**Internal Pull-Down Resistor**	**Comment**
PB1,PA12	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、internal pull-up/pull-down resistance | accuracy ±20%
PB5	8	-	10K	10K	
PC7	8	-	10K	10K	
USBDP	4mA	-	1.5K	15K	
USBDM	4mA	-	180K	15K	

2.6 DAC Characteristics

Table 2-6

Parameter	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
Frequency Response	20	_	20K	Hz	1KHz/0dB 10Kohm loading With A-Weighted Filter
THD+N	_	-75	_	dB	
S/N	_	95	_	dB	
Crosstalk	_	-80	_	dB	
Output Swing		1		Vrms	
Dynamic Range		90		dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power	11		_	mW	32ohm loading

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.7 ADC Characteristics

Table 2-7

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		80		dB	1KHz/-60dB
S/N	_	90	91	dB	1KHz/-60dB
THD+N	_	-70	_	dB	
Crosstalk	_	-80	_	dB	

2.8 BT Characteristics

2.8.1 Transmitter

Basic Data Rate **Table 2-8**

Parameter		Min	Typ	Max	Unit	Test Conditions
RF Transmit Power			4	6	dBm	25℃, Power Supply VBAT=5V 2441MHz
RF Power Control Range			20		dB	
20dB Bandwidth			950		KHz	
Adjacent Channel Transmit Power	+2MHz		-40		dBm	
	-2MHz		-38		dBm	
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

Enhanced Data Rate **Table 2-8**

Parameter		Min	Typ	Max	Unit	Test Conditions
Relative Power			-1		dB	25℃, Power Supply VBAT=5V 2441MHz
π/4 DQPSK Modulation Accuracy	DEVM RMS		6		%	
	DEVM 99%		10		%	
	DEVM Peak		15		%	
Adjacent Channel Transmit Power	+2MHz		-40		dBm	
	-2MHz		-38		dBm	
	+3MHz		-44		dBm	
	-3MHz		-35		dBm	

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.8.2 Receiver

Basic Data Rate **Table 2-9**

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	
Co-channel Interference Rejection			-13		dB	
Adjacent Channel Interference Rejection	+1MHz		+5		dB	25℃, Power Supply VBAT=5V 2441MHz
	-1MHz		+2		dB	
	+2MHz		+37		dB	
	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	


Enhanced Data Rate **Table 2-10**

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	
Co-channel Interference Rejection			-13		dB	
Adjacent Channel Interference Rejection	+1MHz		+5		dB	25℃, Power Supply VBAT=5V 2441MHz
	-1MHz		+2		dB	
	+2MHz		+37		dB	
	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3、Package Information

3.1 SOP16

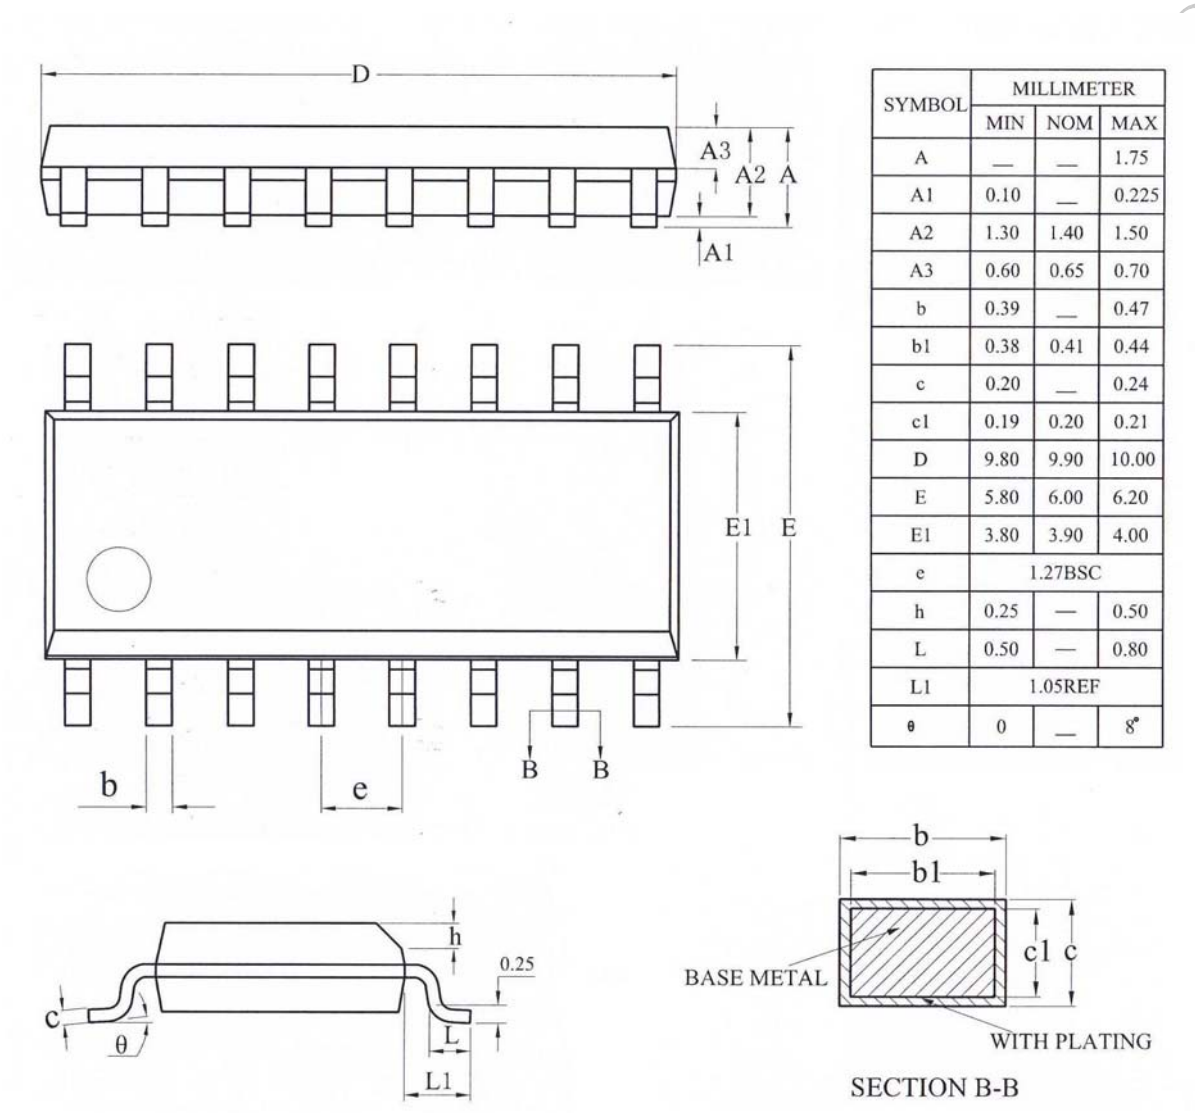

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.75
A1	0.10	—	0.225
A2	1.30	1.40	1.50
A3	0.60	0.65	0.70
b	0.39	—	0.47
b1	0.38	0.41	0.44
c	0.20	—	0.24
c1	0.19	0.20	0.21
D	9.80	9.90	10.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27BSC		
h	0.25	—	0.50
L	0.50	—	0.80
L1	1.05REF		
θ	0	—	8°

Figure 3-1 AC6959G Package

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

4、Revision History

Date	Revision	Description
2020.05.20	V1.0	Initial Release

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.